



www.rjc.sa - info@rjc.sa

رکاز الجودة للمقاولات العامة Rakaz Al Joudah General Contracting

C.R. No: 2050175808

VAT NO: 301143888700003

7279 Al Khobar Al Janubiyah

5207 Al khobar 34622

Saudi Arabia

السجل التجاري: ٢٠٥٠١٧٥٨٠٨

الرقم الضريبي: ٣٠١١٤٣٨٨٨٧٠٠٠٣

٧٢٧٩ الخبر جنوبية


٥٢٠٧ الخبر ٣٤٦٢٢

المملكة العربية السعودية

Datasheet

Rental Genie GS-1532 Scissor Lift

Brand: Genie

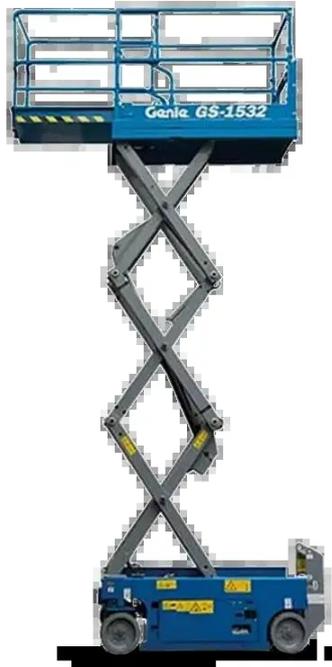

Short Description

The Genie® GS™-1532 scissor lift is a compact, electric-powered platform ideal for indoor and outdoor construction, maintenance, and installation tasks on firm, level surfaces. With a working height of up to 6.57m (21 ft) and a lift capacity of 272 kg (600 lb), it offers excellent maneuverability in tight spaces. Features include a 91 cm (3 ft) extension deck, proportional controls, and non-marking tires for enhanced safety and efficiency.



www.rjc.sa - info@rjc.sa

رکاز الجودة للمقاولات العامة Rakaz Al Joudah General Contracting

C.R. No: 2050175808

السجل التجاري: ٢٠٥٠١٧٥٨٠٨

VAT NO: 301143888700003

الرقم الضريبي: ٣٠١١٤٣٨٨٨٧٠٠٠٠٣

7279 Al Khobar Al Janubiyah

٧٢٧٩ الخبر جنوبية

5207 Al khobar 34622

٥٢٠٧ الخبر ٣٤٦٢٢

Saudi Arabia

المملكة العربية السعودية

Full Description

Genie® GS™-1532 Scissor Lift

The Genie® GS™-1532 scissor lift is a versatile, electric-powered solution designed for both indoor and outdoor applications, delivering reliable performance on firm, level surfaces. With a maximum working height of 6.57 m (21 ft) and a platform capacity of up to 272 kg (600 lb), this compact scissor lift is perfect for construction, maintenance, and installation tasks in confined spaces.

Engineered for efficiency and safety, the GS-1532 features a 91 cm (3 ft) extension deck, providing additional workspace for operators and tools. Its zero-emission electric drive system ensures environmentally friendly operation, while non-marking tires protect sensitive flooring, making it ideal for indoor use. The lift's tight turning radius and compact dimensions (1.83 m length x 0.81 m width) enable superior maneuverability in crowded work environments.

Key features include proportional lift and drive controls for smooth operation, a robust steel platform with slip-resistant flooring, and a fold-down guardrail system for easy access and storage. The GS-1532 is equipped with Genie's Smart Link™ control system, offering intuitive diagnostics and enhanced serviceability. Safety is prioritized with features like an emergency stop system, tilt alarm, and descent alarm, ensuring operator confidence at height.

With a maximum drive speed of 4 km/h (2.5 mph) when stowed and a gradeability of 25%, the GS-1532 handles a variety of terrains with ease. Its low maintenance requirements and durable construction make it a cost-effective choice for rental companies, contractors, and facility managers seeking reliable aerial access solutions.

- **Max Working Height:** 6.57 m (21 ft)
- **Platform Capacity:** 272 kg (600 lb)
- **Extension Deck:** 91 cm (3 ft)
- **Weight:** Approx. 1,236 kg (2,724 lb)
- **Power Source:** 24V DC (4 x 6V batteries)
- **Dimensions:** 1.83 m (L) x 0.81 m (W) x 2.03 m (H, stowed)

The Genie GS-1532 combines compact design, safety, and productivity, making it an essential tool for a wide range of elevated work tasks.

Images





www.rjc.sa - info@rjc.sa

رکاز الجودة للمقاولات العامة Rakaz Al Joudah General Contracting

C.R. No: 2050175808

VAT NO: 301143888700003

7279 Al Khobar Al Janubiyah

5207 Al khobar 34622

Saudi Arabia

السجل التجاري: ٢٠٥٠١٧٥٨٠٨

الرقم الضريبي: ٣٠١١٤٣٨٨٨٧٠٠٠٣

٧٢٧٩ الخبر جنوبية

٥٢٠٧ الخبر ٣٤٦٢٢

المملكة العربية السعودية

Technical Specifications

Rental Genie GS-1532 Scissor Lift

Specification	Value
Manufacturer	Genie
Model Number	GS-1532
Working height maximum	6.57 m
Platform height maximum	4.57 m
Platform length (extended)	2.54 m
Platform length (retracted)	1.63 m
Slide-out platform extension	0.91 m
Platform width (inside)	0.74 m
Guardrail height	1.10 m
Toeboard height	0.15 m
Stowed height (fixed rails)	1.96 m
Stowed height (folding guardrails)	2.03 m
Stowed height (rails folded)	1.73 m
Stowed length	1.83 m
Stowed length (extended)	2.74 m
Width	0.81 m
Wheelbase	1.32 m
Ground clearance (centre)	0.06 m
Ground clearance (pothole guards deployed)	0.02 m
Maximum platform occupancy (indoor)	2
Maximum platform occupancy (outdoor)	1
Lift capacity	272 kg
Drive speed (stowed)	4.0 km/h
Drive speed (raised)	0.8 km/h
Gradeability	30%
Turning radius (outside)	1.55 m
Raise speed	16 sec
Lower speed	29 sec
Power source	24 V (four 6 V 225 Ah batteries)
Hydraulic system capacity	14.2 L
Weight	1238 kg